

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 16 RANGE 2

DATE: 4-16-02--5-19-06

PARTY CHIEF: Wilcoxon

CREW: Survey mark nail

TYPE OF MARKER: PK nail set over bolt in

METHOD OF ESTABLISHMENT: County: concrete 12" down

7-30-96


IN. S.P.C. E ZONE NAD '83

NAME: 16023605

N: 504047.5034(m)

E: 49161.4157(m)

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.

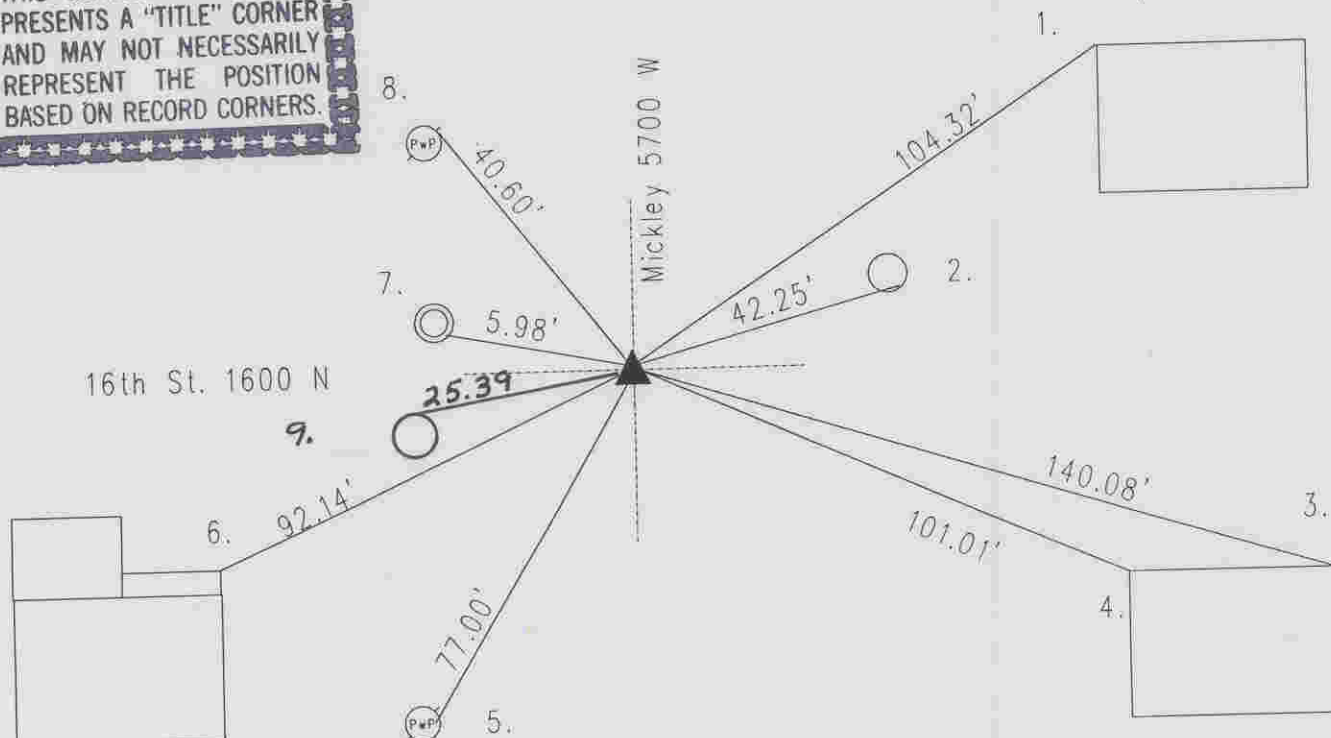

History for corner: The center of section was dug on 3-8-88 and a square bolt in concrete found 12" down. MCSO identified this as the center of section, since a survey by Paul R. Brown 3-25-43 noted a bolt set in concrete in the Wayne Township Legal Survey Book pg. 120.

16023605

REF.	DISTANCE	DESCRIPTION
1.	104.32'	NW corner of brick for ADDRESS 1601
2.	42.25'	SE corner of inlet
3.	140.08'	NE corner of brick for ADDRESS 1549
4.	101.01'	NW corner "
5.	77.00'	PK nail E PwP#101-494 A 8"up
6.	92.14'	NE corner of porch slab for ADDRESS 6001
7.	5.98'	Cut 'x' SE rim of sewer manhole
8.	40.60'	PK nail NE PwP#369-454 B 8"up
9.	25.39'	Mag nail w/bw NW PwP 102-494 40" wp